

# DATASHEET

# Display Surface-mount ELSD-405SDRWB/S530-A3/S968



## Features

- Industrial standard size.
- Packaged in tape and reel for SMT manufacturing.
- The thickness is thinness than tradition display.
- Low power consumption.
- Categorized for luminous intensity.
- Pb free and RoHS compliant.

## Description

- The ELSD-405SDRWB/S530-A3/S968 is a 10.0mm (0.39") digit height seven-segment display.
- The display provides excellent reliability in bright ambient light.
- The device is made with white segments and black surface.

## Applications

- Home appliances
- Instrument panels
- · Digital readout displays

**Expired Period: Forever** 

# **Device Selection Guide**

Chip Materials	Emitted Color	Resin Color
AlGaInP	Deep-Red	White Diffusion

# Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V <sub>R</sub>	5	V
Forward Current	I <sub>F</sub>	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I <sub>FP</sub>	60	mA
Power Dissipation	Pd	60	mW
Operating Temperature	T <sub>opr</sub>	-40 ~ +105	
Storage Temperature	T <sub>stg</sub>	-40 ~ +105	
Soldering Temperature (Soldering time 5 seconds)	T <sub>sol</sub>	260	

# Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity <sup>*1</sup>	lv	7.8	17.6		mcd	I <sub>F</sub> =10mA
Peak Wavelength	λρ		650		nm	I <sub>F</sub> =20mA
Dominant Wavelength	λd		639		nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	I <sub>F</sub> =20mA
Forward Voltage	V <sub>F</sub>		2.0	2.4	V	I <sub>F</sub> =20mA
Reverse Current	I <sub>R</sub>			10	μA	V <sub>R</sub> =5V

Note:

1. Luminous Intensity is a average value which is measured one 7-segment.

2. Tolerance of Luminous Intensity: ± 10  $\,\%$ 

3. Tolerance of Forward Voltage:  $\pm 0.1V$ 

R 2 Copyright © 2010, Everlight All Rights Reserved. Release Date : July 21, 2014 Issue No : DDF-0001426 Rev.3


## **Bin Range of Luminous Intensity**

Bin Code	Min.	Max.	Unit	Condition
Q	7.8	12.5	-	
R	11.0	17.6		
S	15.0	24.0	-	
Т	21.0	34.0	mcd	I <sub>F</sub> =10mA
U	30.0	48.0		
V	42.0	67.0		

R 3 Copyright © 2010, Everlight All Rights Reserved. Release Date : July 21, 2014 Issue No : DDF-0001426 Rev.3


EVERLIGHT

## **Typical Electro-Optical Characteristics Curves**

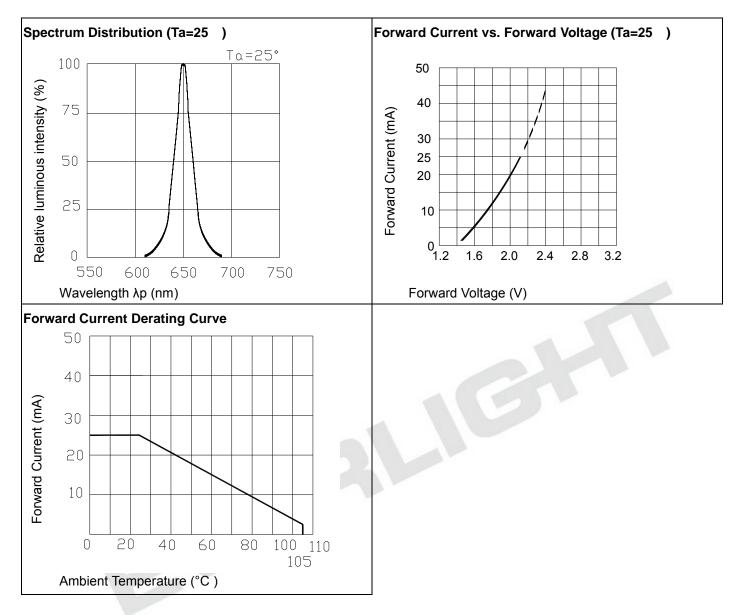

Copyright © 2010, Everlight All Rights Reserved. Release Date : July 21, 2014 Issue No : DDF-0001426 Rev.3

## Package Dimension & Internal Circuit Diagram

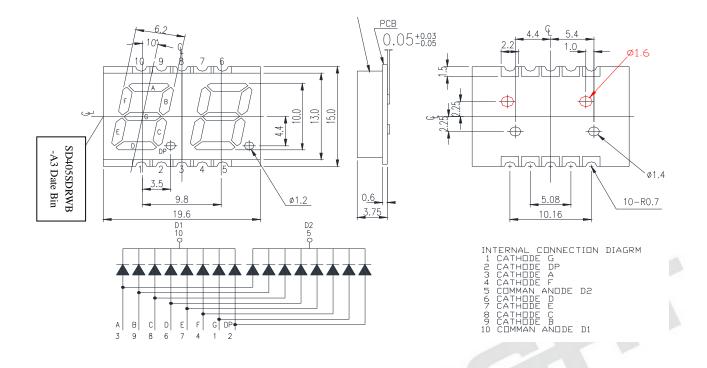

#### Note:


1. Tolerances unless mentioned ±0.25mm. Unit = mm

R 5 Copyright © 2010, Everlight All Rights Reserved. Release Date : July 21, 2014 Issue No : DDF-0001426 Rev.3




#### Packing Materials

Label Explanation




- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Reference
- REF: Reference
- LOT No: Lot Number
- · DC: Year and Weekly
- REFERENCE: Volume Label code

#### **Reel Dimensions**

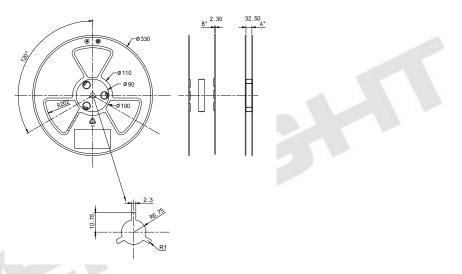


## Carrier Tape Dimensions: Loaded Quantity 800 PCS Per Reel

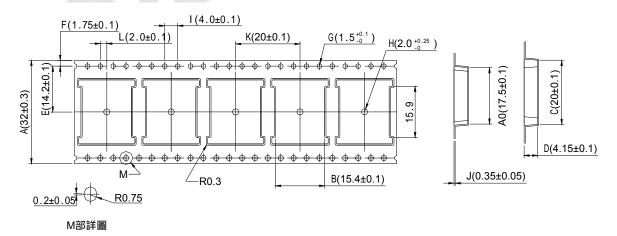

Note: Tolerances unless mentioned ±0.25mm. Unit = mm Packing Process


# EVERLIGHT

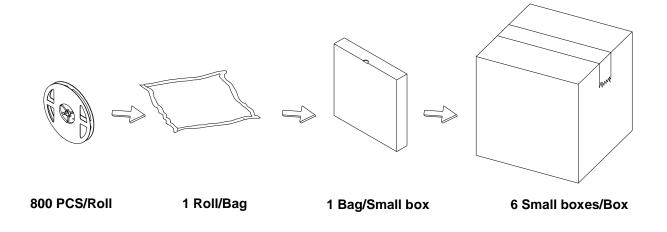

## **Precautions for Use**

### 1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

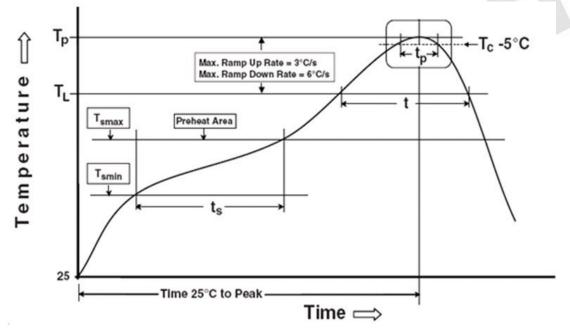

### Note:

### Preheat

Temperature min  $(T_{smin})$ Temperature max  $(T_{smax})$ Time  $(T_{smin} \text{ to } T_{smax}) (t_s)$ Average ramp-up rate  $(T_{smax} \text{ to } T_p)$  Reference: IPC/JEDEC J-STD-020D

150 °C 200 °C 60-120 seconds 3 °C/second max.

#### Other


R 7 Copyright © 2010, Everlight All Rights Reserved. Release Date : July 21, 2014 Issue No : DDF-0001426 Rev.3 WWW.everlight.com



Liquidus Temperature (TL)	217 °C
Time above Liquidus Temperature (t L)	60-150 seconds
Peak Temperature (T <sub>P</sub> )	260 °C
Time within 5 °C of Actual Peak Temperature: $T_{P}$ - 5 °C	30 seconds
Ramp- Down Rate from Peak Temperature	6 °C/second max
Time 25°C to peak temperature	8 minutes max.
Reflow times	1 time

All parameters are maximum body case temperature values and cannot be considered as a soldering profile. The body case temperature was measured by soldering a thermal couple to the soldering point of LEDs.

ax.



Note: Suggested pad dimension is just for reference only. Please modify the pad dimension based on individual need.

## **Application Restrictions**

- 1. Specification described in this document. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT Corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.
- 4. ESD (Electrostatic Discharge)
  - The products are sensitive to static electricity or surge voltage. ESD can damage a die and its reliability. When handling the products, the following measures against electrostatic discharge are strongly recommended:

Eliminating the charge Grounded wrist strap, ESD footwear, clothes, and floors Grounded workstation equipment and tools ESD table/shelf mat made of conductive materials

- Proper grounding is required for all devices, equipment, and machinery used in product assembly. Surge protection should be considered when designing of commercial products.
- If tools or equipment contain insulating materials such as glass or plastic, the following measures against electrostatic discharge are strongly recommended: Dissipating static charge with conductive materials
  Preventing charge generation with moisture
  - Neutralizing the charge with ionizers

5. The LEDs should be operated with forward bias. The driving circuit must be designed so that the LEDs are not subjected to forward or reverse voltage while it is off. If reverse voltage is continuously applied to the LEDs, it may cause migration resulting in LED damage.